



## Radiation Intensity:

**Radiation intensity** is the power radiated in a given direction per unit solid angle, and has unit of watts per square radian (or steradian) ( $W/sr$ ). It is independent of distance ( $r$ ).

### a) Solid angle

The measure of a plane angle is a radian. One **radian** is defined as the plane angle with its vertex at the center of a circle of radius  $r$  that is subtended by an arc whose length is  $r$ . A graphical illustration is shown in Figure 4.1(a). Since the circumference of a circle of radius  $r$  is  $C = 2\pi r$ , there are  $2\pi$  rad ( $2\pi r/r$ ) in a full circle.

The measure of a solid angle is a steradian. One **steradian** is defined as the solid angle with its vertex at the center of a sphere of radius  $r$  that is subtended by a spherical surface area equal to that of a square with each side of length  $r$ . A graphical illustration is shown in Figure 4.1(b). Since the area of a sphere of radius  $r$  is  $A = 4\pi r^2$ , there are  $4\pi$  sr ( $4\pi r^2/r^2$ ) in a closed sphere.

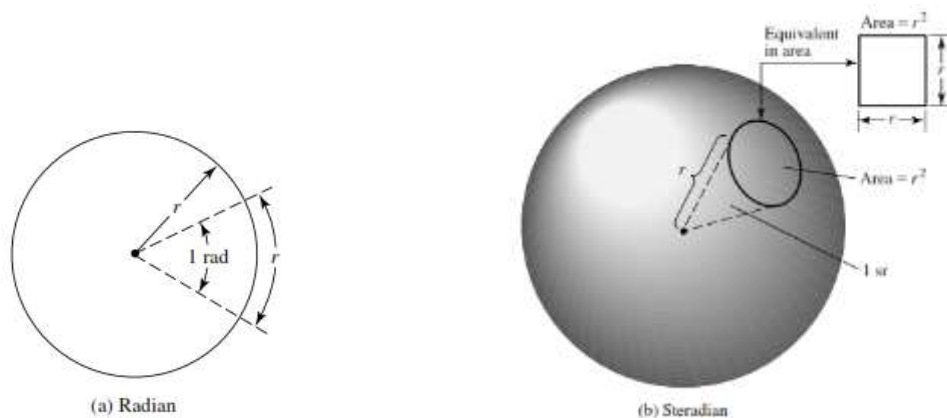


Figure 4.1 Geometrical arrangements for defining a radian and a steradian.

The infinitesimal area  $dA$  on the surface of a sphere of radius  $r$ , shown in Figure 4.2, is given by

$$dA = r^2 \sin \theta d\theta d\phi \text{ (m}^2\text{)}$$

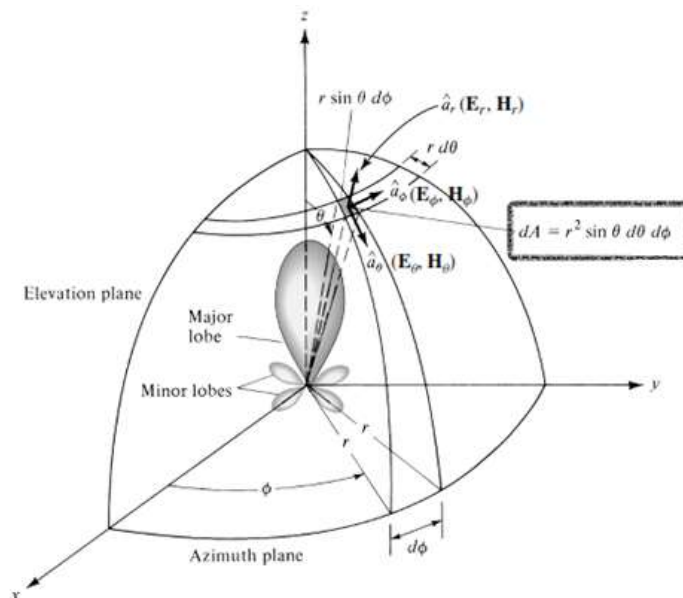


Figure 4.2

Therefore the element of solid angle  $d\Omega$  of a sphere can be written as

$$d\Omega = \frac{dA}{r^2} = \sin \theta d\theta d\phi \text{ (sr)}$$

**Example: -**

For a sphere of radius  $r$ , find the solid angle  $\Omega$  (in square radians or steradians) of a spherical cap on the surface of the sphere over the north-pole region defined by spherical angles of  $0 \leq \theta \leq 30^\circ$ ,  $0 \leq \phi \leq 360^\circ$ .

**Solution: -**

$$\begin{aligned} \Omega &= \iint d\Omega = \int_0^{2\pi} \int_0^{\pi/6} \sin \theta d\theta d\phi \\ &= 2\pi \int_0^{\pi/6} \sin \theta d\theta = 2\pi [-\cos \theta]_0^{\pi/6} = 2\pi [-0.867 + 1] = 0.83566 \end{aligned}$$



b) Radiation intensity  $U$

$$U = \frac{d\Pi}{d\Omega}, W/sr ,$$

and hence,

$$\Pi = \oint\limits_{4\pi} U d\Omega, W$$

where,  $\Pi$ , is the radiated power.

There is a direct relation between the radiation intensity  $U$  and radiation power density  $P$  (Poynting vector magnitude of far field).

$$P = \frac{d\Pi}{ds} = \frac{d\Pi}{dA}, W/m^2$$

Then

$$U = r^2 \cdot P$$

It was already shown that the power density of the far field depends on the distance from the source as  $1/r^2$ , since the far field magnitude depends on  $r$  as  $1/r$ . Thus, the radiation intensity  $U$  depends only on the direction  $(\theta, \varphi)$  but not on the distance  $r$ .

The power pattern is a trace of the function  $|U(\theta, \varphi)|$  usually normalized to its maximum value. The normalized pattern will be denoted as  $\bar{U}(\theta, \varphi)$ .

In the far-field zone, the radial field components vanish, and the remaining transverse components of the electric and the magnetic far field are in phase and have magnitudes related by

$$|\mathbf{E}| = \eta |\mathbf{H}|.$$

That is why the far-field Poynting vector  $P$  has only a radial component and it is a real number showing the *radiation density*:



$$P = \frac{1}{2} \eta |\mathbf{H}|^2 = \frac{1}{2} \frac{|\mathbf{E}|^2}{\eta}$$

Then, for the *radiation intensity*, we obtain in terms of the electric field

$$U(\theta, \varphi) = \frac{r^2}{2\eta} |\mathbf{E}|^2$$

The above equation leads to a useful relation between the power pattern and the amplitude field pattern:

$$U(\theta, \varphi) = \frac{r^2}{2\eta} |E_{\theta}^2(r, \theta, \varphi) + E_{\varphi}^2(r, \theta, \varphi)| = \frac{1}{2\eta} |E_{\theta_p}^2(\theta, \varphi) + E_{\varphi_p}^2(\theta, \varphi)|$$

Here,  $E_{\theta_p}(\theta, \varphi)$  and  $E_{\varphi_p}(\theta, \varphi)$  denote the far-zone field patterns.

#### Examples:

- 1) Radiation intensity and pattern of an isotropic radiator:

$$P(r, \theta, \varphi) = \frac{\Pi}{4\pi r^2}$$

$$U(\theta, \varphi) = r^2 \cdot P = \frac{\Pi}{4\pi} = \text{const.}$$

$$\Rightarrow \underline{\underline{\bar{U}(\theta, \varphi) = 1.}}$$

The normalized pattern of an isotropic radiator is simply a sphere of a unit radius.

- 2) Radiation intensity and pattern of an infinitesimal dipole:

From Lecture 3, the far-field term of the electric field is:

$$E_{\theta} = j\eta \frac{\beta \cdot (I\Delta l) \cdot e^{-j\beta r}}{4\pi r} \cdot \sin \theta \Rightarrow \bar{E}(\theta, \varphi) = \sin \theta,$$

$$U = \frac{r^2}{2\eta} |\mathbf{E}|^2 = \eta \frac{\beta^2 \cdot (I\Delta l)^2}{32\pi^2} \cdot \sin^2 \theta,$$

$$\Rightarrow \underline{\underline{\bar{U}(\theta, \varphi) = \sin^2 \theta.}}$$



## Directivity:

*Directivity of an antenna* (in a given direction) is the ratio of the radiation intensity in this direction and the radiation intensity averaged over all directions.

*The radiation intensity averaged over all directions* is equal to the total power radiated by the antenna ( $\Pi$ ) divided by  $4\pi$ . If a direction is not specified, then the direction of maximum radiation is implied.

It can be also defined as the ratio of the radiation intensity (**RI**) of the antenna in a given direction and the **RI** of an isotropic radiator fed by the same amount of power:

$$D(\theta, \varphi) = \frac{U(\theta, \varphi)}{U_{av}} = 4\pi \frac{U(\theta, \varphi)}{\Pi}$$

$$D_{max} = 4\pi \frac{U_{max}}{\Pi}$$

The directivity is a dimensionless quantity. The maximum directivity is always  $\geq 1$

### Examples:

1) Directivity of an isotropic antenna:

$$U(\theta, \varphi) = U_0 = \text{constant}$$

$$\Pi = 4\pi U_0$$

$$D(\theta, \varphi) = 4\pi \frac{U(\theta, \varphi)}{\Pi} = 1$$

$$D_{max} = 1$$

2) Directivity of an infinitesimal dipole:

$$U(\theta, \varphi) = \frac{r^2}{2\eta} |E|^2 \quad \text{but } E_\theta = j\eta \frac{\beta(I\Delta l)e^{-j\beta r}}{4\pi r} \sin \theta \Rightarrow |E_\theta|^2 = \eta^2 \frac{\beta^2(I\Delta l)^2}{(4\pi r)^2} (\sin \theta)^2$$

$$U(\theta, \varphi) = \frac{r^2}{2\eta} \left( \eta^2 \frac{\beta^2(I\Delta l)^2}{(4\pi r)^2} (\sin \theta)^2 \right) = \eta \frac{\beta^2(I\Delta l)^2}{32\pi} (\sin \theta)^2$$

$$\bar{U}(\theta, \varphi) = \sin^2 \theta$$

Then we can represent the radiation intensity as  $U(\theta, \varphi) = M \cdot \bar{U}(\theta, \varphi)$



The radiated power  $\Pi$  is calculated from the radiation intensity as

$$\Pi = \oint\limits_{4\pi} U d\Omega = M \cdot \int\limits_0^{2\pi} \int\limits_0^{\pi} \sin^2 \theta \sin \theta d\theta d\varphi = M \cdot \frac{8\pi}{3}$$

$$D(\theta, \varphi) = 4\pi \frac{U(\theta, \varphi)}{\Pi} = 4\pi \frac{M \cdot \sin^2 \theta}{M \cdot \frac{8\pi}{3}} = \frac{3}{2} \sin^2 \theta$$

$$D_{max} = 1.5$$

**Exercise:**

Calculate the maximum directivity of an antenna with a radiation intensity  $U = M \cdot \sin \theta$ .

(Answer:  $D_{max} = 4/\pi \approx 1.27$ )

Directivity in terms of *relative radiation intensity*  $\bar{U}(\theta, \varphi)$ .

$$U(\theta, \varphi) = M \cdot \bar{U}(\theta, \varphi)$$

$$\Pi = \oint\limits_{4\pi} U d\Omega = M \cdot \int\limits_0^{2\pi} \int\limits_0^{\pi} \bar{U}(\theta, \varphi) \sin \theta d\theta d\varphi$$

$$D(\theta, \varphi) = 4\pi \frac{U(\theta, \varphi)}{\Pi} = 4\pi M \cdot \bar{U}(\theta, \varphi) / M \cdot \int\limits_0^{2\pi} \int\limits_0^{\pi} \bar{U}(\theta, \varphi) \sin \theta d\theta d\varphi$$

$$D_{max} = 4\pi / \int\limits_0^{2\pi} \int\limits_0^{\pi} \bar{U}(\theta, \varphi) \sin \theta d\theta d\varphi$$



### Beam solid angle $\Omega_A$ :

The *beam solid angle*  $\Omega_A$  of an antenna is the solid angle through which all the power of the antenna would flow if its radiation intensity were constant and equal to the maximum radiation intensity  $U_0$  for all angles within  $\Omega_A$ .

They reflect the mathematical meaning of the definition above

$$\Pi = \oint\limits_{4\pi} U d\Omega = \oint\limits_{\Omega_A} U_0 d\Omega = U_0 \Omega_A$$

$$\therefore \Omega_A = \frac{\Pi}{U_0} = \oint\limits_{4\pi} U d\Omega / U_0 = \oint\limits_{4\pi} \bar{U} d\Omega = \int\limits_0^{2\pi} \int\limits_0^{\pi} \bar{U}(\theta, \varphi) \sin \theta d\theta d\varphi$$

The relation between the maximum directivity  $D_{max}$  and the beam solid angle  $\Omega_A$  is obvious from previous equation as

$$D_{max} = 4\pi / \Omega_A$$

### Antenna gain:

*The gain*  $G$  of an antenna is the ratio of the radiation intensity  $U$  in a given direction and the radiation intensity that would be obtained, if the power fed to the antenna were radiated isotropically.

$$G(\theta, \varphi) = 4\pi \frac{U(\theta, \varphi)}{P_{in}}$$

The gain is a dimensionless quantity, which is very similar to the directivity  $D$ . When the antenna has no losses, i.e. when  $P_{in} = \Pi$ , then  $G(\theta, \varphi) = D(\theta, \varphi)$ . Thus, the gain of the antenna takes into account the losses in the antenna system. It is calculated via the *input power*  $P_{in}$ , which is a measurable quantity, unlike the directivity, which is calculated via the radiated power  $\Pi$ .

There are many factors that can worsen the transfer of energy from the transmitter to the antenna (or from the antenna to the receiver):

- mismatch losses,
- losses in the transmission line,
- losses in the antenna: dielectric losses, conduction losses, polarization losses.



The power radiated by the antenna is always less than the power fed to the antenna system,  $\Pi \leq P_{in}$ , unless the antenna has integrated active devices. That is why usually  $G \leq D$ .

*According to the IEEE Standards (The Institute of Electrical and Electronics Engineers Standards), the gain does not include losses arising from impedance mismatch and from polarization mismatch.*

Therefore, the gain takes into account only the *dielectric* and *conduction* losses of the antenna system itself.

The radiated power is related to the input power through a coefficient called the *radiation efficiency*  $e$ :

$$\Pi = e \cdot P_{in}, e \leq 1$$

$$G(\theta, \varphi) = e \cdot D(\theta, \varphi)$$

The Maximum gain  $G_{max}$  is also related to the maximum directivity  $D_{max}$ ,

$$G_{max} = 4\pi \frac{U_{max}}{P_{in}}$$

$$G_{max} = e \cdot D_{max}$$

Since the gain and directivity are power ratio they can be calculated in decibels as follows:

$$G_{dB} = 10 \log G$$

For the directivity

$$D_{dB} = 10 \log D$$





## Antenna efficiency:

The total efficiency of the antenna  $e_t$  is used to estimate the total loss of energy at the input terminals of the antenna and within the antenna structure. It includes all mismatch losses and the dielectric/conduction losses (described by the *radiation efficiency*  $e$  as defined by the IEEE Standards):

$$e_t = e_p \cdot e_r \cdot \underbrace{e_c \cdot e_d}_e = e_p \cdot e_r \cdot e$$

Here:  $e_r$  is the reflection efficiency (impedance mismatch),

$e_p$  is the polarization mismatch efficiency,

$e_c$  is the conduction efficiency,

$e_d$  is the dielectric efficiency.

The reflection efficiency can be calculated through the reflection coefficient  $\Gamma$  at the antenna input:

$$e_r = 1 - |\Gamma|^2$$

$\Gamma$  can be either measured or calculated, provided the antenna impedance is known:

$$\Gamma = \frac{Z_{in} - Z_c}{Z_{in} + Z_c}$$

$Z_{in}$  is the antenna input impedance and  $Z_c$  is the characteristic impedance of the feed line.

If there are no polarization losses, then the total efficiency is related to the radiation efficiency as

$$e_t = e \cdot (1 - |\Gamma|^2)$$

**Voltage Standing Wave Ratio (VSWR)** is another parameter related to the reflection coefficient, this parameter can be calculated as

$$VSWR = \frac{1 + |\Gamma|}{1 - |\Gamma|}$$



## Beam efficiency:

The *beam efficiency* is the ratio of the power radiated in a cone of angle  $2\Theta_1$  and the total radiated power. The angle  $2\Theta_1$  can be generally any angle, but usually this is the first-null beam width (or minimum).

$$BE = \frac{\int_0^{2\pi} \int_0^{\Theta_1} U(\theta, \varphi) \sin \theta \, d\theta d\varphi}{\int_0^{2\pi} \int_0^{\pi} U(\theta, \varphi) \sin \theta \, d\theta d\varphi}$$

If  $\Theta_1$  is chosen as the angle where the first null or minimum occurs, then the beam efficiency will indicate the amount of power in the *major* lobe compared to the total power. A very high beam efficiency (between the nulls or minimums), is necessary for antennas used in radiometry, astronomy, radar, and other applications where received signals through the *minor* lobes must be minimized.

## Frequency bandwidth (FBW):

This is the range of frequencies, within which the antenna characteristics (input impedance, pattern) conform to certain specifications.

Antenna characteristics, which should conform to certain requirements, might be: input impedance, radiation pattern, beamwidth, polarization, side-lobe level, gain, beam direction and width, radiation efficiency. Separate bandwidths may be introduced: impedance bandwidth, pattern bandwidth, etc.

The **FBW** of *broadband* antennas is expressed as the ratio of the upper to the lower frequencies, where the antenna performance is acceptable:

$$FBW = f_{max}/f_{min}$$

*Broadband* antennas with **FBW** as large as 40:1 have been designed. Such antennas are referred to as *frequency independent antennas*.

For *narrowband* antennas, the FBW is expressed as a percentage of the frequency difference over the center frequency:

$$FBW = \frac{f_{max} - f_{min}}{f_0} \times 100\%$$

Usually,  $f_0 = (f_{max} + f_{min})/2$  or  $f_0 = \sqrt{f_{max} \cdot f_{min}}$



**Example:**

The radial component of the radiated power density of an antenna is given by  $P = A_0 \frac{\sin \theta}{r^2} \hat{a}_r, \left(\frac{W}{m^2}\right)$ , where  $A_0$  is the peak value of the power density,  $\theta$  is the usual spherical coordinate, and  $\hat{a}_r$  is the radial unit vector. Determine the total radiated power  $\Pi$ .

**Solution:**

$$\Pi = \oiint_S \mathbf{P} \cdot d\mathbf{s} = \int_0^{2\pi} \int_0^\pi A_0 \frac{\sin \theta}{r^2} \hat{a}_r \cdot r^2 \sin \theta d\theta d\varphi \hat{a}_r = A_0 \pi^2 W$$

Or by using radiation intensity  $U$

$$U = r^2 \cdot P = A_0 \sin \theta \hat{a}_r, \left(\frac{W}{sr}\right)$$

$$\Pi = \oiint_{4\pi} U d\Omega = \int_0^{2\pi} \int_0^\pi A_0 \sin \theta \cdot \sin \theta d\theta d\varphi = A_0 \pi^2 W$$

**Example:**

The normalized radiation intensity of an antenna is represented by

$$U(\theta) = \cos^2(\theta) \cos^2(3\theta), w/sr$$

Find the

- half-power beamwidth HPBW (in radians and degrees)
- first-null beamwidth FNBW (in radians and degrees)

**Solution:**

a- Since the  $U(\theta)$  represent the power pattern, to find HPBW, set the function equal to half of its maximum value.

$$U(\theta)|_{\theta=\theta_h} = \cos^2(\theta) \cos^2(3\theta)|_{\theta=\theta_h} = 0.5$$

$$\therefore \cos(\theta_h) \cdot \cos(3\theta_h) = 0.707$$

$$\theta_h = \cos^{-1}\left(\frac{0.707}{\cos(3\theta_h)}\right)$$



Since this is an equation with transcendental functions, it can be solved iteratively. After a few iterations, it is found that

$$\theta_h \approx 0.25 \text{ radians} = 14.375$$

Since the function  $U(\theta)$  is symmetrical about the maximum at  $\theta = 0$ , then the HPBW is  $HPBW = 2\theta_h \approx 0.5 \text{ radians} = 28.75$

b- To find the first-null beamwidth (FNBW), set the  $U(\theta)$  equal to zero,

$$U(\theta)|_{\theta=\theta_n} = \cos^2(\theta) \cos^2(3\theta)|_{\theta=\theta_n} = 0$$

This lead to two solutions for  $\theta_n$ .

$$\text{Either } \cos(\theta_n) = 0 \Rightarrow \theta_n = \cos^{-1} 0 = \frac{\pi}{2} \text{ radians} = 90^\circ$$

$$\text{Or } \cos(3\theta_n) = 0 \Rightarrow \theta_n = \frac{1}{3} \cos^{-1} 0 = \frac{\pi}{6} \text{ radians} = 30^\circ$$

The one with the smallest value leads to the FNBW. Again, because of the symmetry of the pattern, the FNBW is

$$FNBW = 2\theta_n = \frac{\pi}{3} \text{ radians} = 60^\circ$$

### Example:

The radial component of the radiated power density of an infinitesimal linear dipole of length  $l \ll \lambda$  is given by  $P = A_0 \frac{\sin^2 \theta}{r^2} \hat{a}_r, \left(\frac{W}{m^2}\right)$ , where  $A_0$  is the peak value of the power density,  $\theta$  is the usual spherical coordinate, and  $\hat{a}_r$  is the radial unit vector. Determine the maximum directivity of the antenna and express the directivity as a function of the directional angles  $\theta$  and  $\varphi$ .

### Solution:

The radiation intensity is given by  $U$

$$U = r^2 \cdot P = A_0 \sin^2 \theta, \text{ The maximum radiation is directed along } \theta = \pi/2.$$

Thus,  $U_{max} = A_0$ , and the total radiated power is given by

$$\Pi = \oint_{4\pi} U d\Omega = \int_0^{2\pi} \int_0^{\pi} A_0 \sin^2 \theta \cdot \sin \theta d\theta d\varphi = A_0 \frac{8\pi}{3} W$$



we find that the maximum directivity is equal to

$$D_{max} = 4\pi \frac{U_{max}}{\Pi} = 4\pi \frac{A_0}{A_0 \frac{8\pi}{3}} = 1.5$$

And the directivity is given by

$$D(\theta, \varphi) = \frac{U(\theta, \varphi)}{U_{av}} = 4\pi \frac{U(\theta, \varphi)}{\Pi} = 4\pi \frac{A_0 \sin^2 \theta}{A_0 \frac{8\pi}{3}} = 1.5 \sin^2 \theta$$

**Example:**

The radiation intensity of the major lobe of an antenna is represented by


$$U = B_0 \cos \theta$$

where  $B_0$  is the maximum radiation intensity. The radiation intensity exists only in the upper hemisphere ( $0 \leq \theta \leq \pi/2$ ,  $0 \leq \varphi \leq 2\pi$ ), and it is shown in Figure below. Find the

- a. beam solid angle.
- b. maximum directivity.

**Solution:**

The half-power point of the pattern occurs at  $\theta = 60^\circ$ . Thus the beamwidth in the  $\theta$  direction is  $120^\circ$  or  $\Theta_{1r} = \frac{2\pi}{3}$

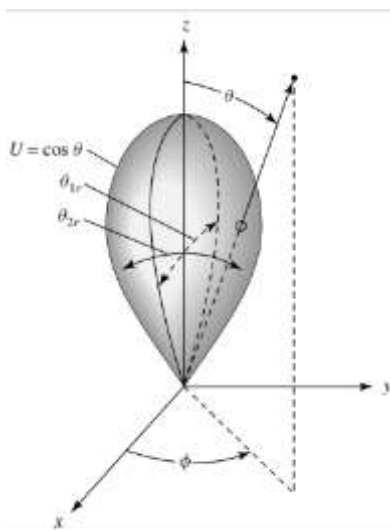

Since the pattern is independent of the  $\varphi$  coordinate, the beamwidth in the other plane is also equal to  $\Theta_{2r} = \frac{2\pi}{3}$



a. Beam solid angle  $\Omega_A$ :

$$\begin{aligned}\Omega_A &= \int_0^{360^\circ} \int_0^{90^\circ} \bar{U} d\Omega = \int_0^{2\pi} \int_0^{\pi/2} \cos\theta \sin\theta d\theta d\varphi \\ &= \int_0^{2\pi} d\varphi \int_0^{\pi/2} \cos\theta \sin\theta d\theta = \pi \int_0^{\pi/2} \sin 2\theta d\theta = \pi \text{ steradian}\end{aligned}$$

b. maximum directivity  $D_{max}$

$$D_{max} = 4\pi / \Omega_A$$

$$D_{max} = 4\pi / \pi = 4 \text{ dimensionless} = 6.02 \text{ dB}$$

**Some useful formulas you may be needing them:**

- ❖  $\cos(A \pm B) = \cos A \cos B \mp \sin A \sin B$
- ❖  $\sin(A \pm B) = \sin A \cos B \pm \cos A \sin B$
- ❖  $\cos A \cos B = \frac{1}{2} [\cos(A - B) + \cos(A + B)]$
- ❖  $\sin A \sin B = \frac{1}{2} [\cos(A - B) - \cos(A + B)]$
- ❖  $\sin A \cos B = \frac{1}{2} [\sin(A - B) + \sin(A + B)]$
- ❖  $\cos^2 \theta = \frac{1 + \cos 2\theta}{2}$
- ❖  $\sin^2 \theta = \frac{1 - \cos 2\theta}{2}$
- ❖  $\sin^2 \theta + \cos^2 \theta = 1$
- ❖  $\sin \theta = \frac{e^{j\theta} - e^{-j\theta}}{2j}$
- ❖  $\cos \theta = \frac{e^{j\theta} + e^{-j\theta}}{2}$
- ❖  $\tan \theta = \frac{e^{j\theta} - e^{-j\theta}}{j(e^{j\theta} + e^{-j\theta})}$