

Three Component Systems Lab. 3

Done By:

Lecturer

Zeina Dawood

Assistant Lecturem
Hiba Sabah



The comparison between two component and three component system

**	JK.
利	*

2 component system	3 component system
2 materials	3 materials
Drawn on ordinary graph paper	Drawn on triangular graph paper
Factors affecting are temp. and concentration	The exp. is done under constant pressure and temperature
The tie line is always parallel to base line	The tie line may be parallel or not
Example phenol/water system	Example HAC,CHCl3,H20 system















Two component system

Three component system

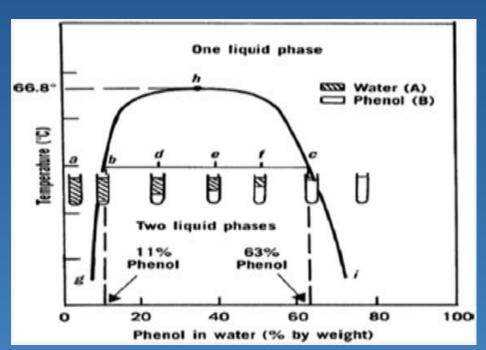

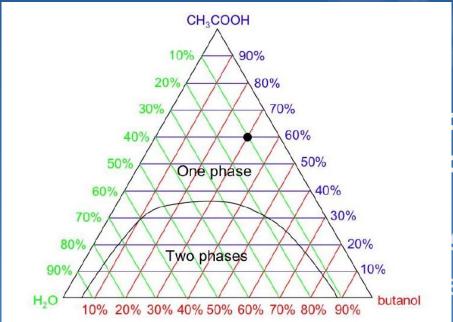








1)Each of the corners or apexes of or triangle represent 100% by wt. of one component (A,B & C) as a result, the same apex will represents 0% of the other two components.








Triangular graph paper

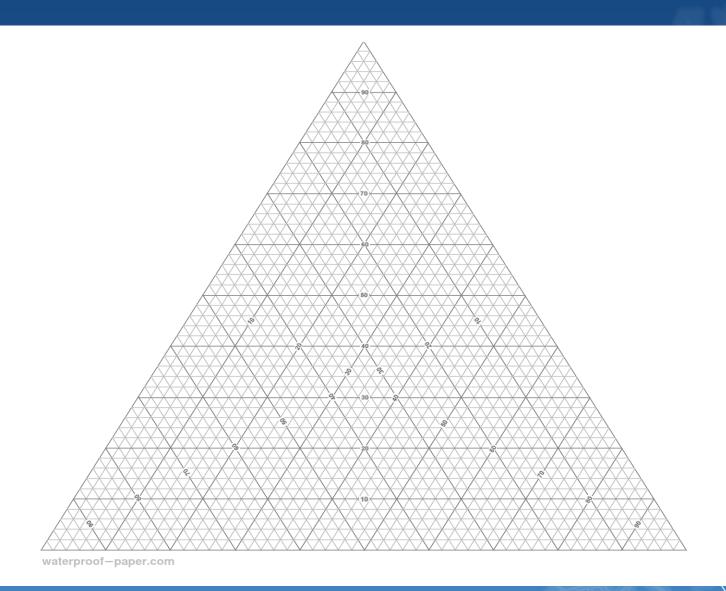

Triangular graph paper

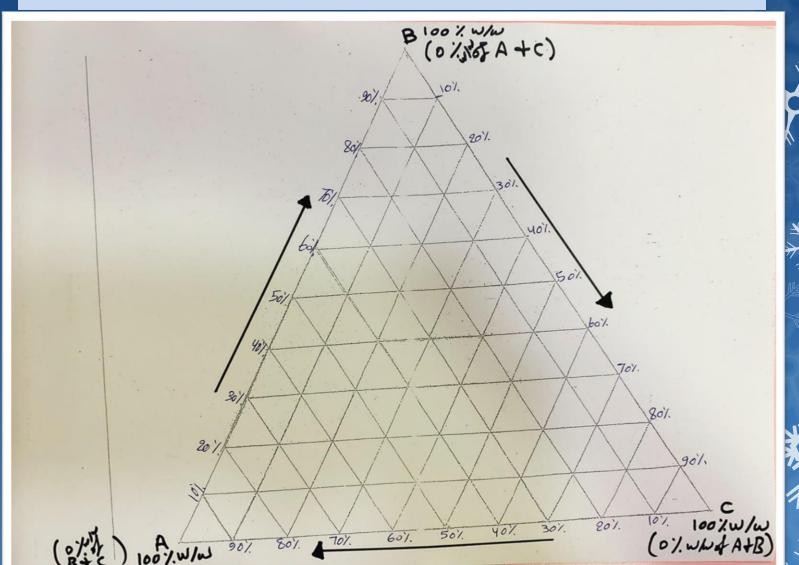


















2) The three lines joining the corner points represent two component mixture of the three possible combination of A, B & C







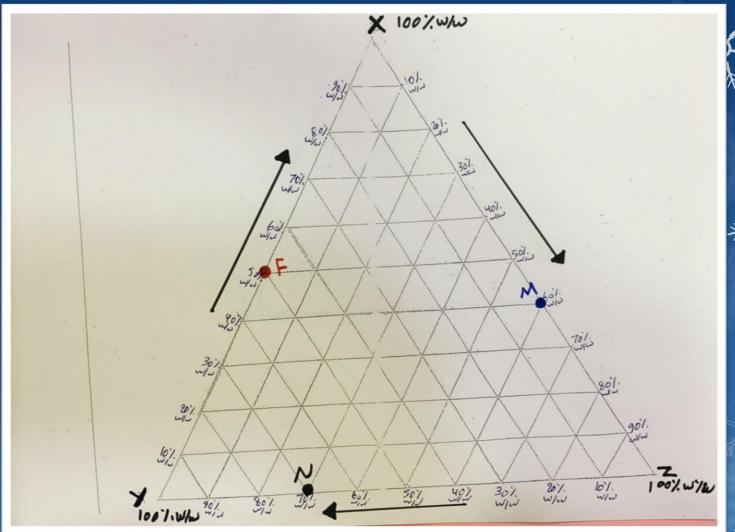

Blue point M : X = 40% w/w, Z = 60% w/w

Red point F: X = 50% w/w, Y = 50% w/w

Black point N: Y = 70% w/w, Z = 30% w/w












3-The area within the triangle represents all possible combinations of A,B&C to give three component system.







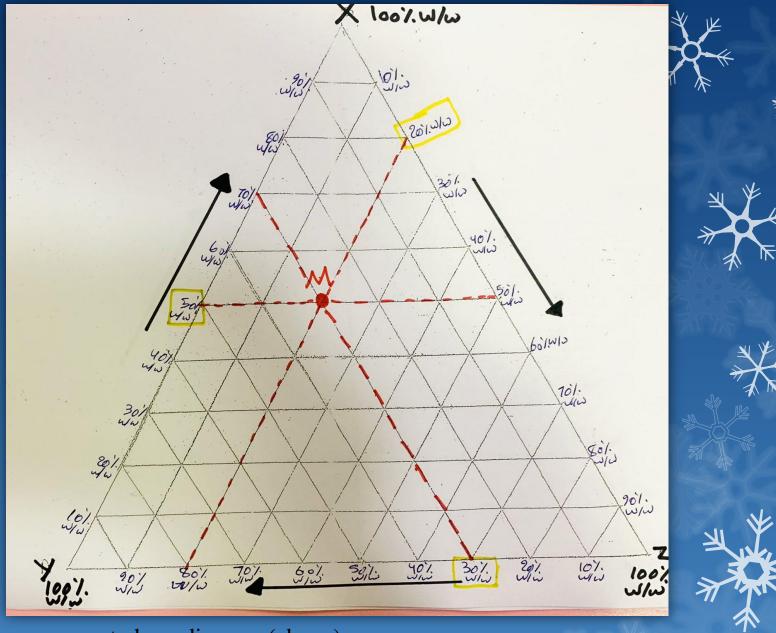


Red point M: X = 50% w/w, Z = 20% w/w and Y=100-(50+20)=30% w/w



components.






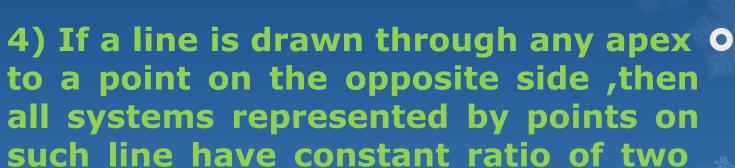







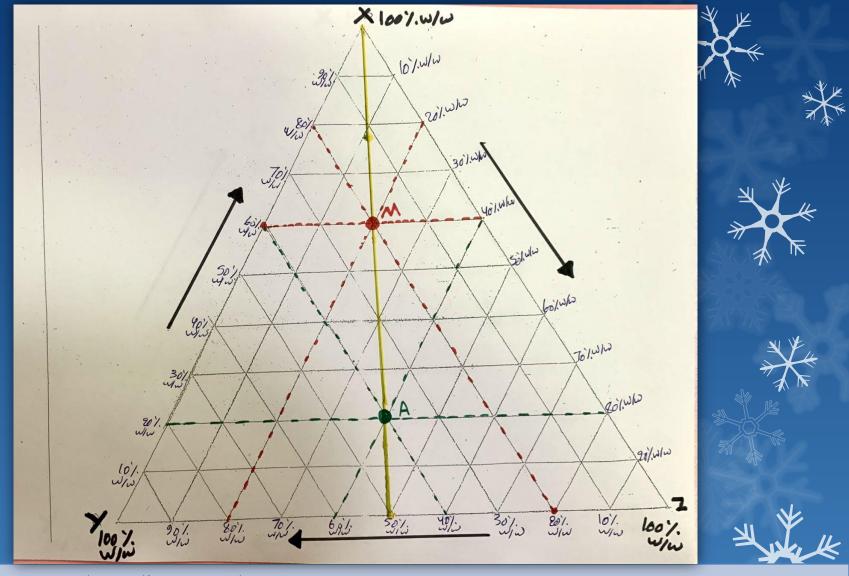

 $Red\ point\ M:\ X = 60\%\ w/w\ \ ,\ Z = 20\%\ w/w\ \ and\ Y = 100-(60+20) = 20\ \%\ w/w\ \ , ratio\ y/z = 20/20 = 1$

Green point A : X = 20% w/w , Z = 40% w/w and Y = 100 - (20 + 40) = 40% w/w, ratio y/z=40/40=1








5) Any line drawn parallel to one side of the triangle represents ternary systems in which the proportion (or % by wt)of one component is constant.








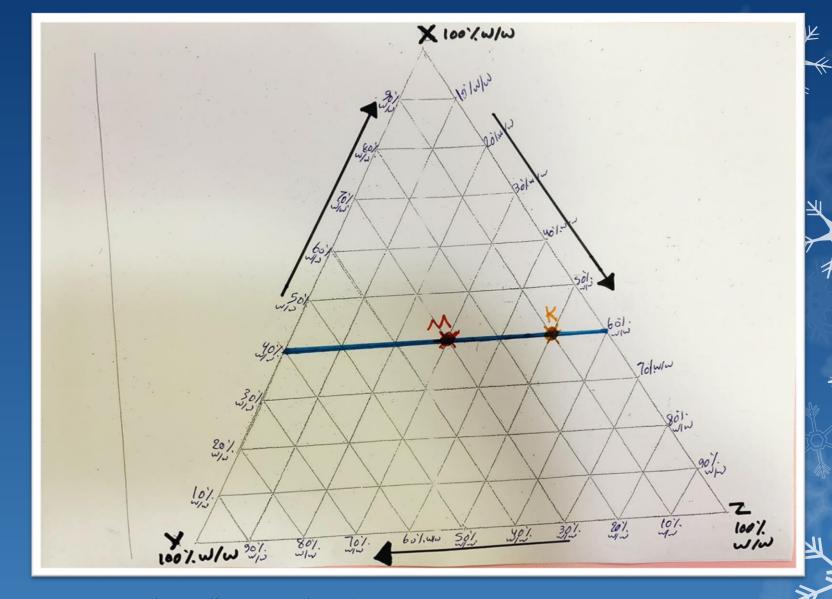

Point M: X = 40% w/w , Z = 30% w/w and Y = 100 - (40 + 30) = 30 % w/w

Point K: X = 40% w/w , Z = 50% w/w and Y = 100 - (40 + 50) = 10% w/w



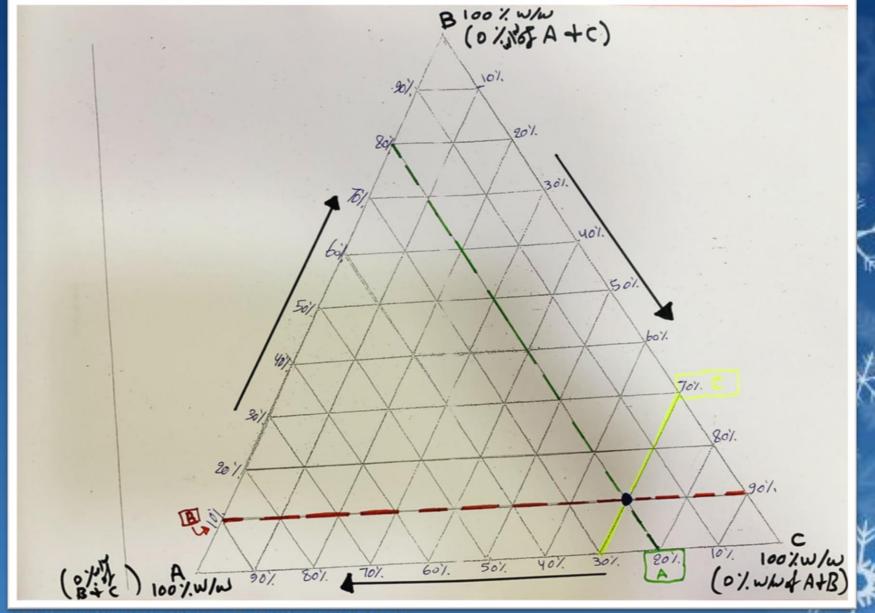

Blue point: A = 20%w/w , B = 10%w/w and C = 70%w/w



Procedure:

1-Prepare 10 gm of the following combination of HAC & CHCl₃:5%, 10%, 20%, 30%, 40%, 50%, 60%, 70%, 80%, and 90% w/w HAC:CHCl₃ in a small clean &dry flask which form one single phase.

2-To these mixtures slowly add water from a burette until a turbidity just appears. Check the weight of water (which is equal to its volume).

Note:-To prepare samples in step no.1, the required amount of HAC&CHCl3 from burettes by converting the weight in to volume according to the law:

Specific gravity (sp.gr) = weight/volume

Sp.gr of HAC = 1.009 and for CHCl3 = 1.4







Group NO.	HAC/ CHCl ₃	HAC ml HAC gm	CHCl ₃ gm	CHCl ₃ ml	H2Ogm ml	***
1	5%	0.5	9.5	6.79		★ M
2	20%	2	8	5.7		
3	40%	4	6	4.3		***
4	70%	7	3	2.14		
5	80%	8	2	1.42		
6	90%	9	1	0.71		








3-Obtain a miscibility curve by calculating the percent w/w of each component in the turbid mixture and plot this triangular diagram.







=10.5gm

FOR HAC: 0.5/10.5*100=4.76%w/w

FOR CHCl3: 9.5/10.5*100=90.5%w/w

FOR H2O: 0.5/10.5*100=4.76%w/w









*Tabulated the amount of HAC ,CHCl3 and H2O *Calculate the % of each point, then drown the binodal curve which separate one phase from two phases area



Group NO.	HAC/ CHCl ₃	HAC%	CHCl ₃ %	H20%
1	5%	4.76%	90.5%	4.76%
2	20%			
3	40%			
4	70%			
5	80%			
6	90%			







