

- Computer Networks
- Al-Mustansiryah University
- Elec. Eng. Department College of Engineering
Fourth Year Class

Chapter 1


Introduction

1.1

1-1 DATA COMMUNICATIONS

Data communications are the exchange of data between two devices via some form of transmission medium such as a wire cable.

The five components that make up a data communications system are the **Message, sender, receiver, medium, and protocol.**

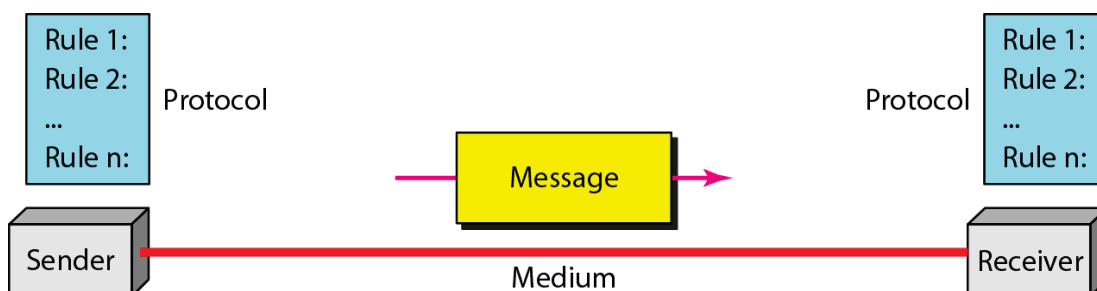

1.2

1-2 NETWORKS

A **network** is a set of devices (often referred to as **nodes**) connected by communication **links**. A node can be a computer, printer, or any other device capable of sending and/or receiving data generated by other nodes on the network. A link can be a cable, air, optical fiber, or any medium which can transport a signal carrying information.

1.3

Network Criteria

- **Performance**
 - Depends on Network Elements
 - Measured in terms of Delay and Throughput
 - **Reliability**
 - Failure rate of network components
 - Measured in terms of availability/robustness
 - **Security**
 - Data protection against corruption/loss of data due to:
 - Errors
 - Malicious users
-


1.4

Physical Structures


- **Type of Connection**
 - Point to Point - single transmitter and receiver
 - Multipoint - multiple recipients of single transmission
- **Physical Topology**
 - Connection of devices
 - Type of transmission - unicast, mulitcast, broadcast

1.5

Figure 1.3 *Types of connections: point-to-point and multipoint*

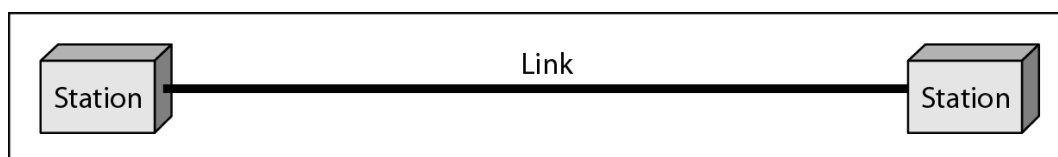


a. Point-to-point

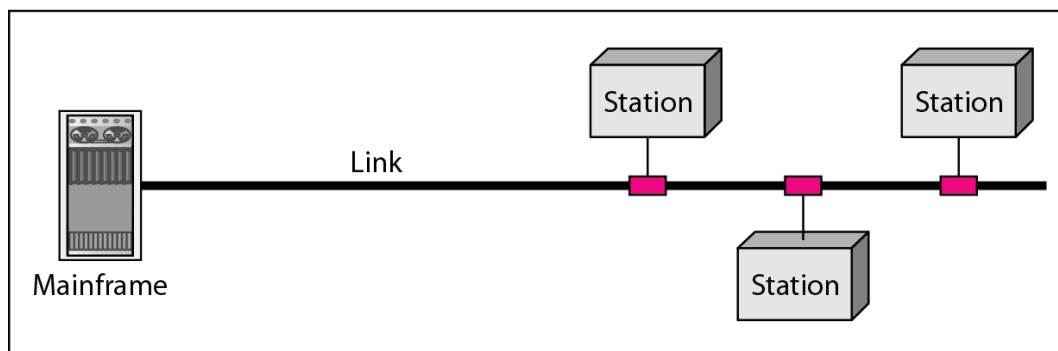

b. Multipoint


1.6

Figure 1.4 *Categories of topology*

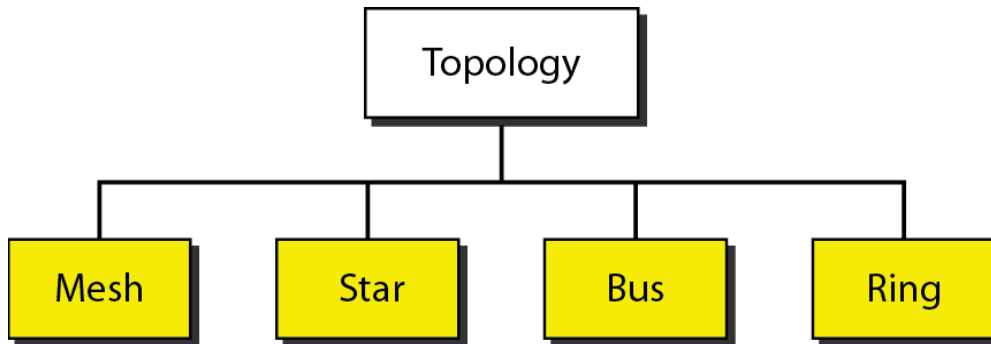

1.7

Figure 1.5 *A fully connected mesh topology (five devices)*

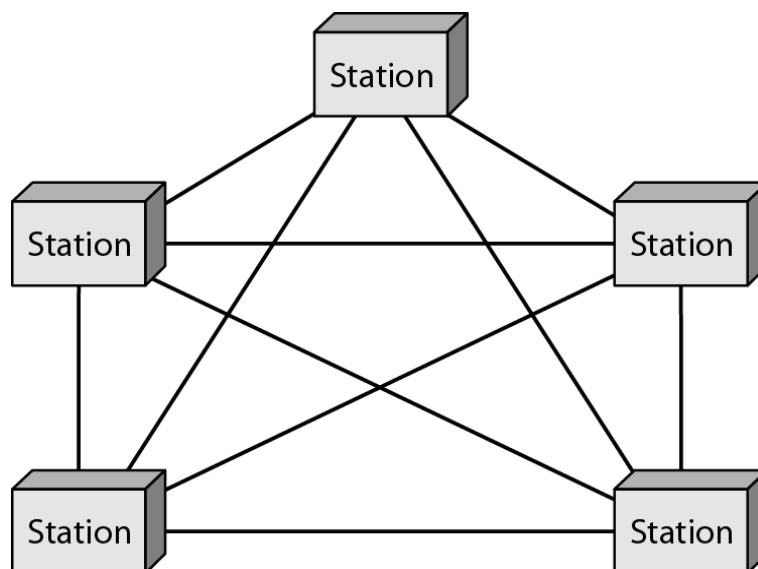

In mesh topology, we need $n(n - 1) / 2$ duplex-mode links

1.8

Advantage of mesh topology

- 1- Use of dedicated links guarantees that each connection can carry its own data load.
- 2- Robust. If one link becomes unusable, it does not incapacitate the entire system.
- 3- Security. When every message travels along a dedicated line, only the intended recipient sees it.
- 4- Point-to-point links make fault identification and fault isolation easy.


1.9

Disadvantage of mesh topology

- 1- The amount of cabling because every device must be connected to every other device.
- 2- The number of I/O ports required.
- 3- The hardware required to connect each link can be prohibitively expensive.

1.10

Figure 1.6 *A star topology connecting four stations*

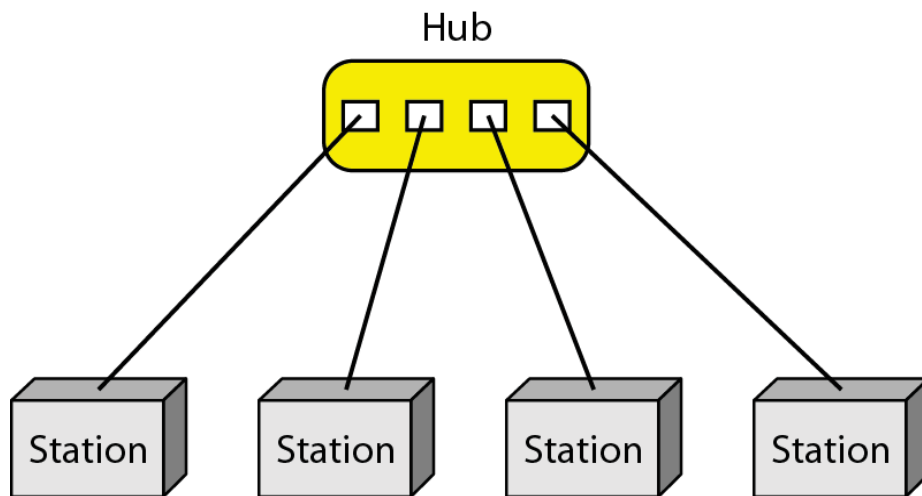

1.11

Advantage of Star topology


- 1- Less expensive than a mesh topology.
- 2- Easy to install and reconfigure. Far less cabling needs to be housed.
- 3- Include robustness.

Disadvantage of Star topology

- 1- the dependency of the whole topology on one single point.
- 2- more cabling is required in a star than in some other topologies (such as ring or bus).

1.12

Figure 1.7 *A bus topology connecting three stations*

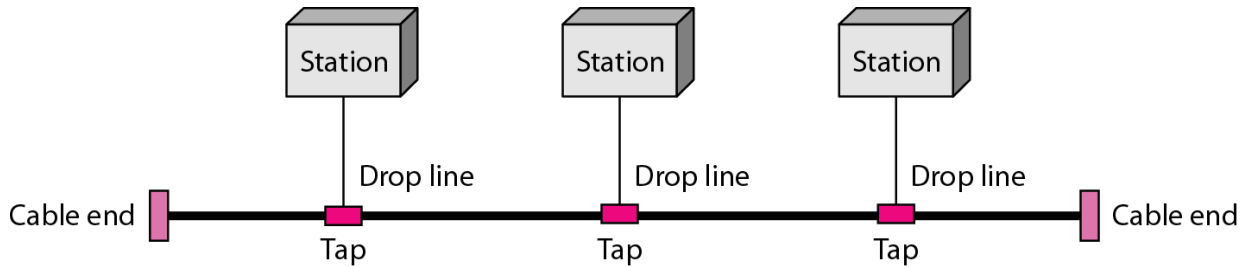

1.13

Advantage of Bus topology

- 1- Ease of installation.
- 2- Less cabling than mesh or star topologies.
- 3- Backbone cable can be laid along the most efficient path, then connected to the nodes by drop lines of various lengths.


1.14

Disadvantage of Bus topology

- 1- Difficult reconnection and fault isolation.
- 2- Signal reflection at the taps can cause degradation in quality.
- 3- Fault or break in the bus cable stops all transmission.

1.15

Figure 1.8 *A ring topology connecting six stations*

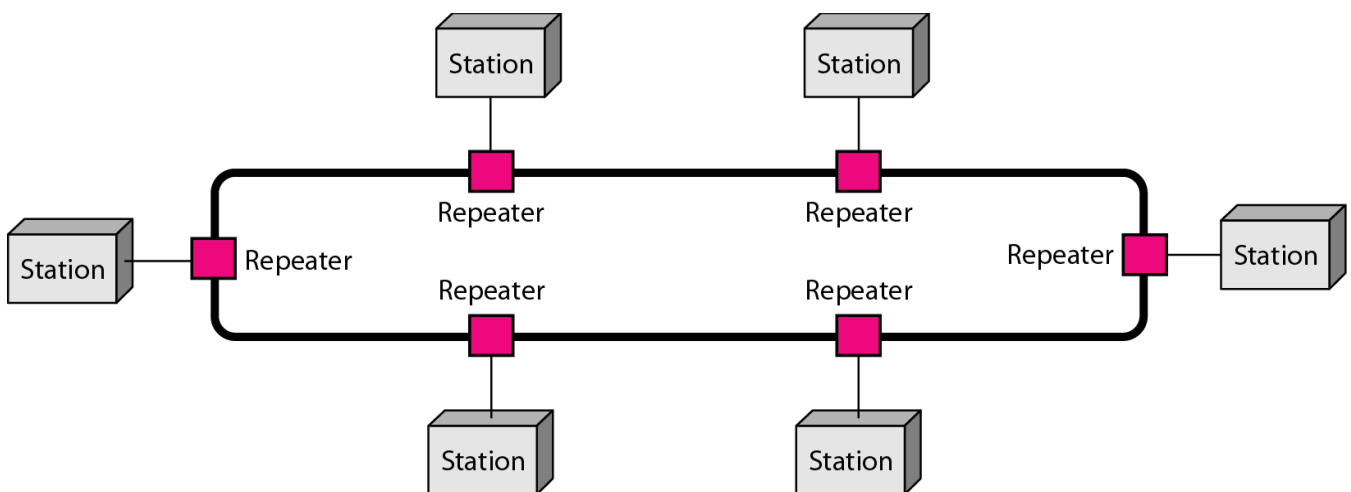

1.16

Advantage of Ring topology


- 1- Easy to install and reconfigure.
- 2- Fault isolation is simplified.

Disadvantage of Ring topology

- Unidirectional traffic.

1.17

Figure 1.9 *A hybrid topology: a star backbone with three bus networks*

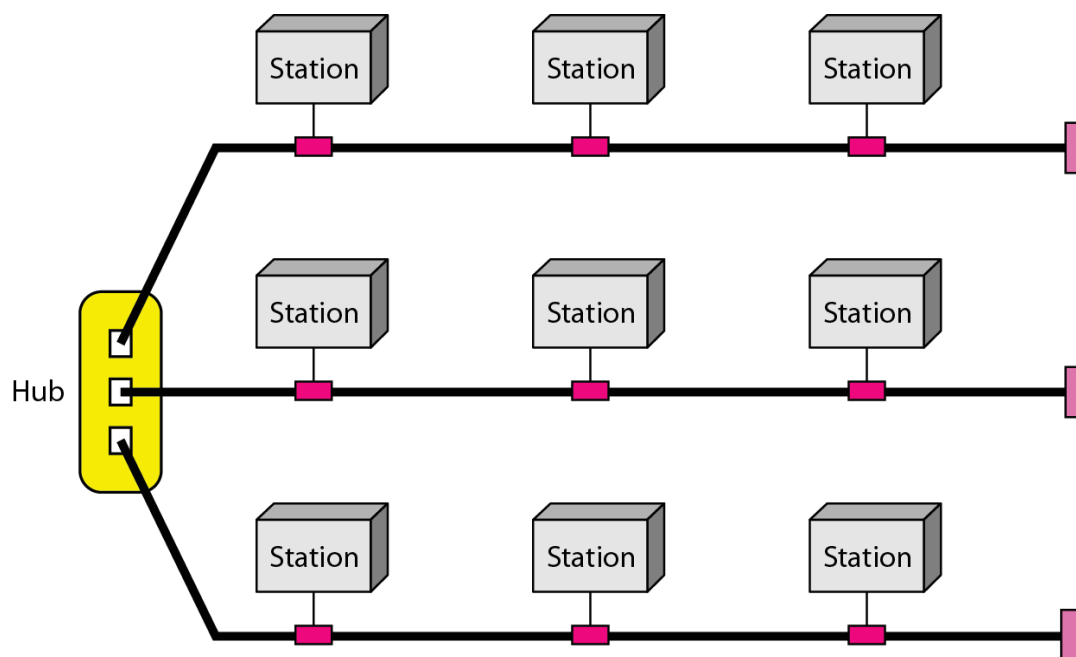


1.18

Categories of Networks

- **Local Area Networks (LANs)**
 - Short distances
 - Designed to provide local interconnectivity
- **Wide Area Networks (WANs)**
 - Long distances
 - Provide connectivity over large areas
- **Metropolitan Area Networks (MANs)**
 - Provide connectivity over areas such as a city, a campus


1.19

Figure 1.10 *An isolated LAN connecting 12 computers to a hub in a closet*

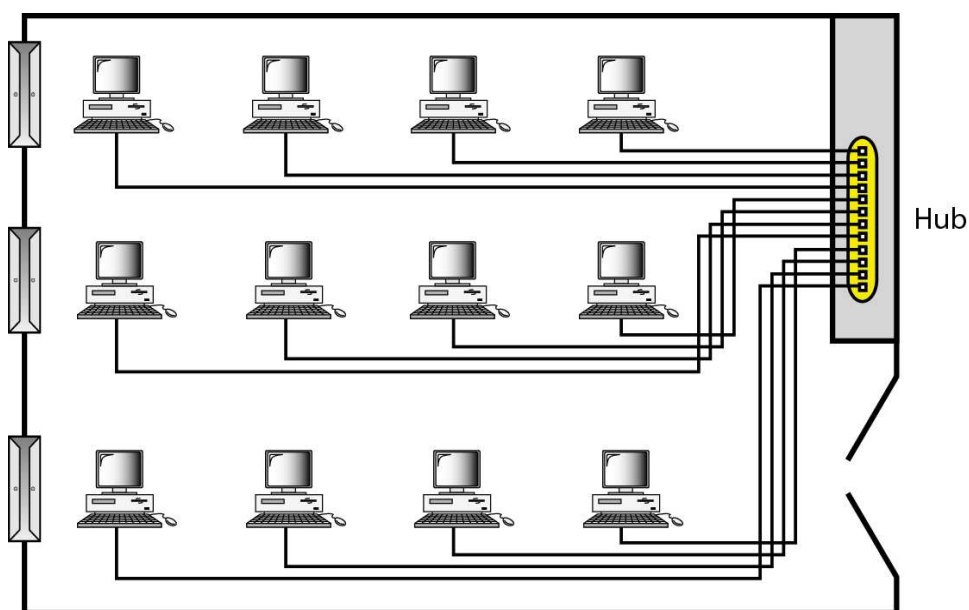

1.20

Figure 1.11 *WANs: a switched WAN and a point-to-point WAN*

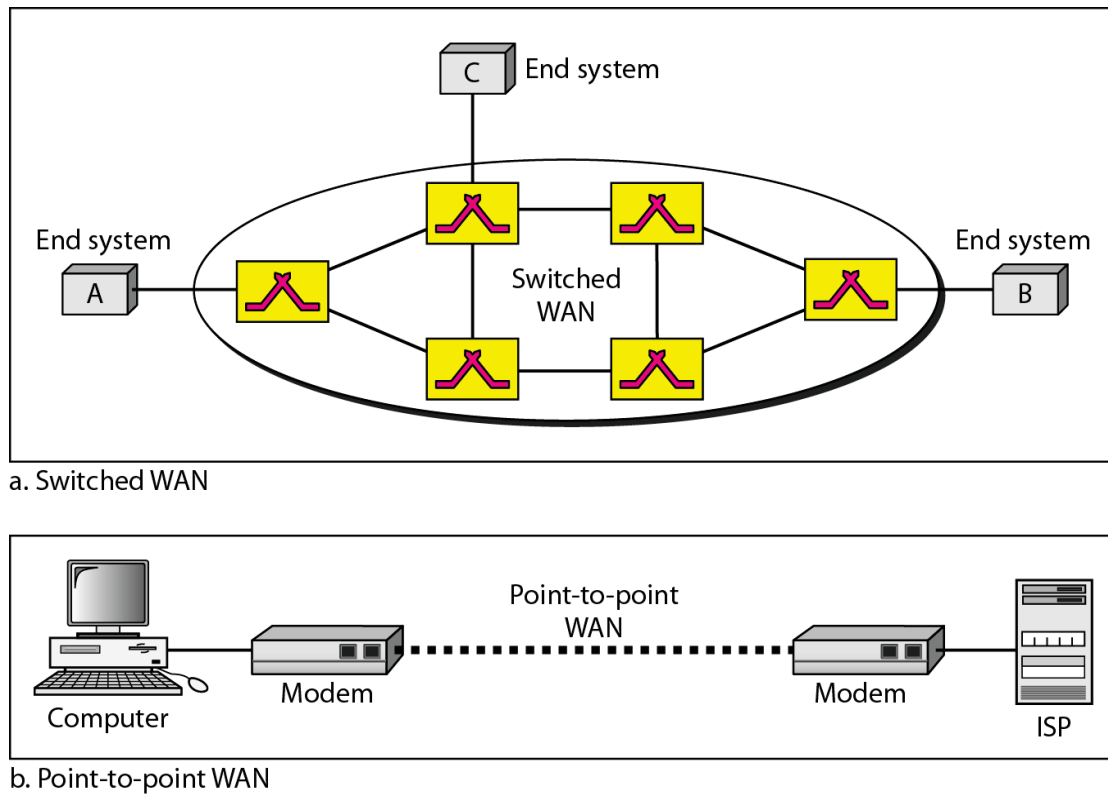

1.21


1-4 PROTOCOLS

A protocol is synonymous with rule. **It consists of a set of rules that govern data communications. It determines what is communicated, how it is communicated and when it is communicated.** The key elements of a protocol are syntax, semantics and timing

1.22

Peer-to-Peer Networks

- Peer-to-peer network is also called workgroup
- No hierarchy among computers \Rightarrow all are equal
- No administrator responsible for the network

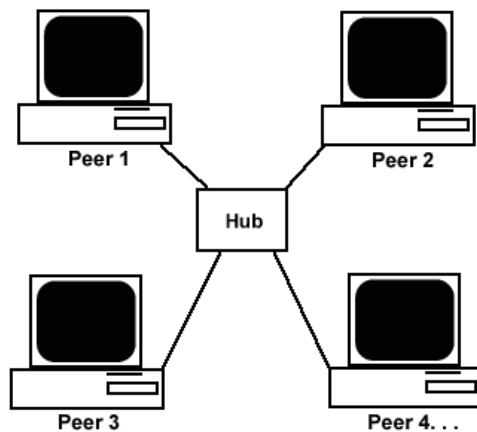

Peer-to-peer


1.23

- Advantages of peer-to-peer networks:
 - Low cost
 - Simple to configure
 - User has full accessibility of the computer
- Disadvantages of peer-to-peer networks:
 - May have duplication in resources
 - Difficult to uphold security policy
- Where peer-to-peer network is appropriate:
 - 10 or less users
 - No specialized services required
 - Security is not an issue

1.24

Clients and Servers

- Network Clients (Workstation)
 - Computers that request network resources or services
- Network Servers
 - Computers that manage and provide network resources and services to clients
 - Usually have more processing power, memory and hard disk space than clients
 - Run Network Operating System that can manage not only data, but also users, groups, security, and applications on the network.

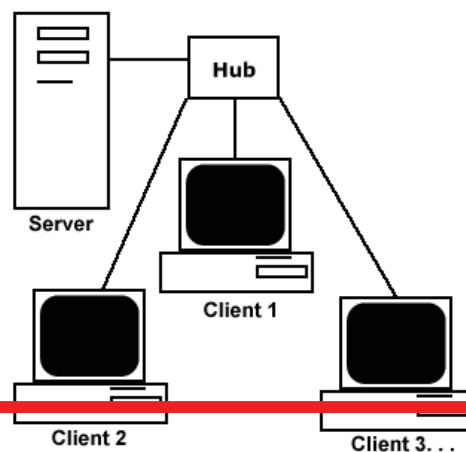

1.25

- Advantages of client/server networks
 - Facilitate resource sharing – centrally administrate and control
 - Facilitate system backup and improve fault tolerance
 - Enhance security – only administrator can have access to Server
 - Support more users – difficult to achieve with peer-to-peer networks
- Disadvantages of client/server networks
 - High cost for Servers
 - Need expert to configure the network
 - Introduce a single point of failure to the system

1.26