

5- Motion in two dimensions

Motion in two dimensions like the motion of projectiles and satellites and the motion of charged particles in electric fields. Here we shall treat the motion in plane with constant acceleration and uniform circular motion.

5-1 Motion in two dimensions with constant acceleration

Assume that the magnitude and direction of the acceleration remain unchanged during the motion. The position vector for a particle moving in two dimensions (x, y plane) can be written as:

$$\vec{r} = x\mathbf{i} + y\mathbf{j}$$

Displacement In Fig. 5.1, an object is initially at position $r_i(t_i)$ at time t_i (point A). Sometime later, t_f , the object is at position $r_f(t_f)$ (point B).

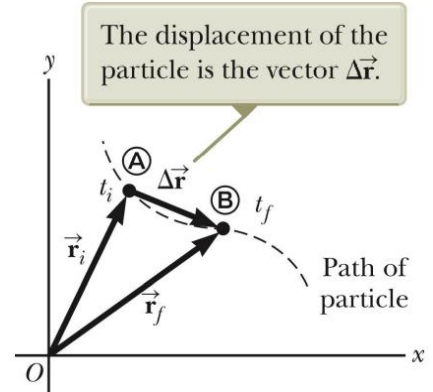


figure 5.1

The displacement vector of the object is given by:

$$\Delta\vec{r} = \vec{r}_f - \vec{r}_i$$

where x , y , and r change with time as the particle moves

The velocity of the particle is given by:

$$\vec{v} = \frac{dr}{dt} = \frac{dx}{dt} \mathbf{i} + \frac{dy}{dt} \mathbf{j}$$

$$\vec{v} = v_x \mathbf{i} + v_y \mathbf{j}$$

Since the acceleration is constant then we can substitute:

$$v_x = v_{x0} + a_x t \quad \& \quad v_y = v_{y0} + a_y t$$

This gives:

$$\begin{aligned} v &= (v_{x0} + a_x t) \mathbf{i} + (v_{y0} + a_y t) \mathbf{j} \\ &= (v_{x0} \mathbf{i} + v_{y0} \mathbf{j}) + (a_x \mathbf{i} + a_y \mathbf{j}) t \end{aligned}$$

Then $v = v_0 + a t$ -----(*)

From the equation (*) we conclude that the velocity of a body at a specific time t is equal to the vector sum of the initial velocity and the velocity resulting from the uniform acceleration

Since our particle moves in two-dimensions x and y with constant acceleration then:

$$x = x_0 + v_{x0} t + \frac{1}{2} a_x t^2 \quad \& \quad y = y_0 + v_{y0} t + \frac{1}{2} a_y t^2$$

But

$$\begin{aligned}
 \mathbf{r} &= x\mathbf{i} + y\mathbf{j} \\
 \mathbf{r} &= (\mathbf{x}_0 + v_{x0}t + \frac{1}{2}a_x t^2)\mathbf{i} + (\mathbf{y}_0 + v_{y0}t - \frac{1}{2}g t^2)\mathbf{j} \\
 &= (\mathbf{x}_0\mathbf{i} + \mathbf{y}_0\mathbf{j}) + (v_{x0}\mathbf{i} + v_{y0}\mathbf{j})t + \frac{1}{2}(a_x\mathbf{i} + a_y\mathbf{j})t^2 \\
 \mathbf{r} &= \mathbf{r}_0 + \mathbf{v}_0t + \frac{1}{2}\mathbf{a}t^2 \text{ ----- (**)}
 \end{aligned}$$

From the equation (**), we conclude that the displacement vector $\mathbf{r} - \mathbf{r}_0$ is the vector summation of the displacement vector resulting from the initial velocity $\mathbf{v}_0 t$ and the displacement resulting from the uniform acceleration $\frac{1}{2}\mathbf{a}t^2$

5-2 Projectile motion

Projectile motion is an example of motion in two dimensions, and we will find the equations of motion for projectiles to determine the horizontal and vertical displacement, velocity, and acceleration.

A good example of the motion in two dimension it the motion of projectile. To analyze this motion let's assume that at time $t=0$ the projectile start at the point $x_0=y_0=0$ with initial velocity v_0 which makes an angle θ_0 , as shown in Figure 5.2

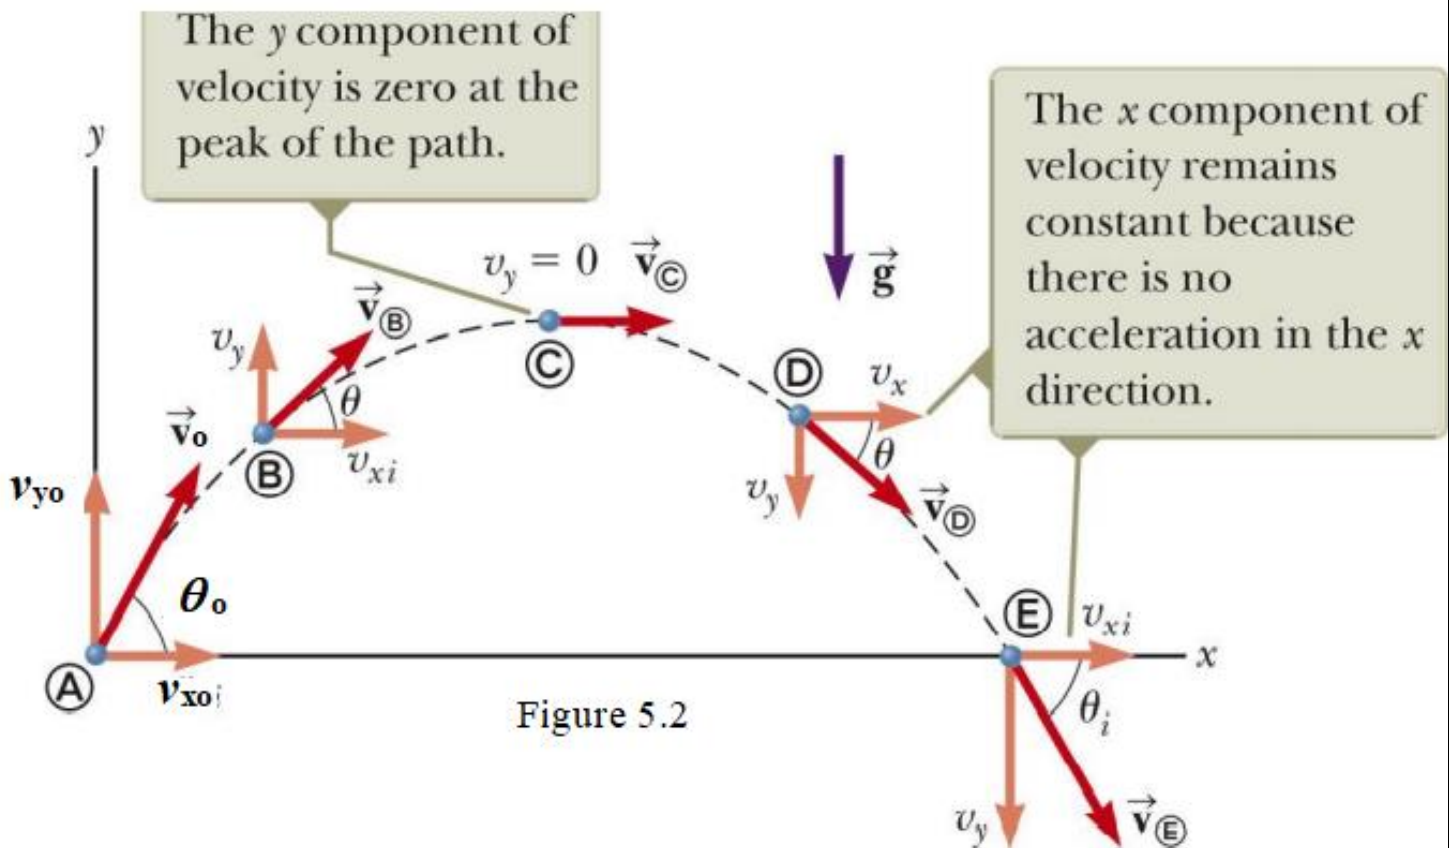


Figure 5.2

Then the two Components of Initial velocity are:

$$v_{x0} = v_0 \cos \theta_0 \quad \& \quad v_{y0} = v_0 \sin \theta_0$$

The two velocity Components (v_x, v_y) at any time are:

$$v_x = v_{x0} = v_0 \cos \theta_0 \quad \text{-----(5-1)}$$

$$v_y = v_{y0} - gt = v_0 \sin \theta_0 - gt \quad \text{-----(5-2)}$$

Instantaneous position of the particle in the direction of x is:

$$x = v_{x0} t = v_0 t \cos \theta_0 \quad \text{-----(5-3)}$$

Instantaneous position of the particle in the direction of y

$$y = v_{y0} t - \frac{1}{2} g t^2 = v_0 t \sin \theta_0 - \frac{1}{2} g t^2 \quad \text{-----(5-4)}$$

$$v = \sqrt{v_x^2 + v_y^2}$$

The angle

$$\theta = \tan^{-1} \frac{v_y}{v_x}$$

The time required for the projectile to reach its highest point, $v_y = 0$.

So, equation (5-2) $v_y = v_{y0} - gt$ can be written : $0 = v_{y0} - gt$

$$\therefore t = \frac{v_{y0}}{g} \quad \Rightarrow \quad t = \frac{v_{y0} \sin \theta_0}{g} \quad \text{-----(5-5)}$$

When sub. Equation (5-5) in equation (5-2) get:

$$y = \frac{v_0^2 \sin^2 \theta_0}{2g} \quad \text{show that?} \quad \text{-----(5-6)}$$

Equation (5-6) shows the highest point the projectile reaches.

Note that:

When calculating the total flight time, $y = 0$

$$\Rightarrow \text{ total flight time: } T = \frac{2v_0 \sin \theta_0}{g} \quad \text{show that?} \quad \text{-----(5-7)}$$

Range is the horizontal distance during the flight time:

$$R = v_{0x} T$$

$$\Rightarrow R = v_0^2 \sin 2\theta_0 / g \quad \text{where R projectile range}$$